


Ba Bi freilauber 0000 0000 0000 Bmax



Device	Ва	Bi	Bmax	L	Lm	H2	Н
Spreader 2.5 m ³	1.18	0.96	1.15	3.20	3.80	2.42	1.86
Spreader 4.0 m ³	1.28	1.06	1.28	3.60	4.20	2.45	1.95
Spreader 4.7 m ³	1.38	1.16	1.42	3.60	4.20	2.48	1.98
Spreader 5.0 m ³	1.60	1.38	1.61	3.60	4.20	2.48	1.98
Spreader 6.5 m ³	1.60	1.38	1.68	4.60	5.20	2.52	2.04

Approx. measures in meter H: maximum hight spreader for pomiculture

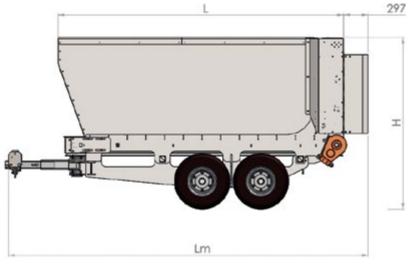

For more information, see www.freilauber.de or simply scan the QR code.

From your authorised dealer





freilauber GmbH | Im Baumfeld 34 | 55237 Flonheim | T.: +49 (0)6734 9149790 | www.freilauber.de | info@freilauber.de

freilauber GmbH | Im Baumfeld 34 | 55237 Flonheim | T.: +49 (0)6734 9149790 | www.freilauber.de | info@freilauber.de

Spreader Jumbo

Suitable for all types of spreading material



freilauber clevere Weinbaugeräte





Suitable for all types of spreading material

freilauber's spreader Jumbo is ideal for fine and coarse compost, manure and also straw. Its filling capacity of 2.5 to 6.5 m³ and widths between 1.15 and 1.68 m are an absolute first in this product class.

Important facts at a glance

- As standard: Tandem axle with brake cylinder (optional one axle)
- Scraper floor and drums are oil-powered and can be controlled independently
- Great discharge performance, tapering in conveying direction
- Galvanised base frame

Extras

- As an option, a third drum, especially for straw, can be fitted
- Separate oil tank with PTO pump
- As an option with grit throw-off, open throw-off, spreading plate or conveyor belt
- Different sizes of volume increase available
- Different tires available

Spreading plate

- For wide spreading result
- Hydraulic regulation of the rotational speed
- For fine spreading material

Conveyor belt

- One-sided throw-off of spreading material
- Spreading direction can be changed
- Hydraulic regulation of the speed
- Suitable for all types of spreading materials

Conveyor belt double-sided

- Double-sided throw-off of spreading material
- Hydraulic regulation of the speed
- Suitable for all types of spreading materials

Separate oil supply

• Mandatory for tractors with less than 60 l/min oil



