



Roller hoe HSO

The Type HSO roller hoe is used for herbicide-free control of weeds in fruit cultivation. As it loosens the ground along the row in a strip of about 23 cm long (with 3 discs) and up to about 95cm long (with 10 discs), it buries weeds with the loosened earth.

Important facts at a glance

- Its sturdy construction enables it to absorb powerful forces, and achieve high driving speed
- Discs made from resistant wear plate
- Discs have a special shape, to ensure an interrupted cutting edge, which reduces erosion on the slope
- Available in double-sided and single-sided variants
- Front-mounted (3-point linkage)
- If required, the frame is also extensible for use with other tools
- Tilting mechanism for travelling on the roads

Variants:

Version with up to 3 discs

- Working angle can be set to meet your requirements, as can the undercut, enabling you to adjust throw properties
- The discs' bearings are lubricated for life
- Width approx 3m to approx 4m

Version with up to 10 discs

- Working angle can be set to meet your requirements
- Width approx 2.8 m to approx 3.8 m (6 blades per side)

Other widths upon request



For more information, see www.freilauber.de or simply scan the QR-Code.

From your authorised dealer

freilauber roller hoes

Fast, lasting weed control



Made in
Germany!




freilauber
clevere Weinbaugeräte

Roller hoe Type HSW

Efficient and reliable in viniculture


The Type HSW roller hoe is used for herbicide-free control of weeds in the vine row. As it loosens the ground along the vine row in a strip of about 120 to 180 mm long (depending on the set working angle and the discs' undercut), it buries weeds with the loosened earth.

Important facts at a glance

- Its sturdy construction enables it to absorb powerful forces, and achieve high driving speed
- Available in double-sided and single-sided variants
- If required, the frame is also extensible for use with other tools

Benefits of the freilauber roller hoe

- 2 discs made from resistant wear plate
- Discs have a special shape to ensure an interrupted cutting edge, which reduces erosion on the slope
- The discs' bearings are lubricated for life
- Working angle can be set to meet your requirements, as can the undercut, enabling you to adjust throw properties

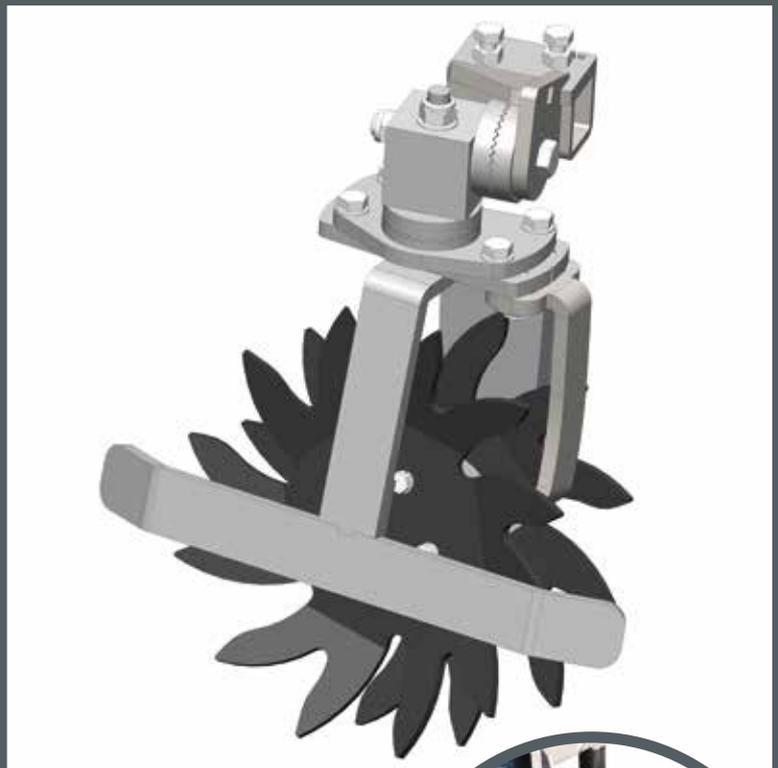

Finger hoe

The finger hoe works in the area between the vines. The fingers yield upon contact with the vines, and the fingers encompass the trunk. Rotation of the fingers effectively removes weeds from the areas between the stocks, thus preventing piles of earth building up.



Roller hoe Type HSW

Front mounting

- Width approx 1.6 m to approx 2.4 m
- Independent height adjustment at both sides, with 42 cm lift
- Symmetrical width offset
- Mounted to front panel, or 3-point console possible



Central axle-mounting

- Width approx 1.6 m to approx 2.1 m
- Independent height adjustment at both sides, with 42 cm lift
- Symmetrical width offset



Rear-mounting

- Width approx 1.4 m to approx 2.2 m
- Symmetrical width offset
- Bar roller for height control
- Possible to use 700 diameter finger hoes



For more information,
see www.freilauber.de or
simply scan the QR-Code.