




Mini fruit tree trimmer

The Mini fruit tree trimmer is the smallest model and is characterised by its light construction. It is affixed to standard lifting frames. In the standard design, the Mini fruit tree trimmer is fitted with a central cutting unit with six saw blades (cutting length 2.15m).

A topping unit with up to two saw blades (cutting length 0.75m), as well as an undercutter with one saw blade (cutting length 0.4m) are optionally available.

Cutting angle adjustment of both the topping unit and undercutter can be made hydraulically or manually. The width offset is 0.5m.

The lift mast also offers 0.7m lift, as well as cutting angle adjustment.

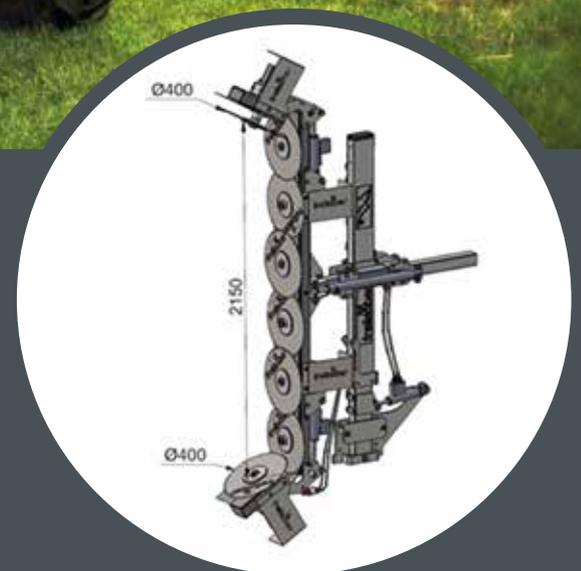

Fruit tree trimmer

With modular construction and tried and tested technology

The fruit tree trimmer is distinguished by its outstanding modularity. The structure can be rapidly adjusted for different types of stone fruit and pip fruit. The base frame is constructed so that it can absorb very powerful forces. Thanks to its newly designed profile, the cutting unit boasts a light yet stable design. As a result of the specially developed bearings in the cutting tools, it is possible to trim branches that are up to 14cm thick.

General fittings for fruit tree and hedge trimmers

All equipment is intended for front mounting. The hedge trimmers and fruit tree trimmers feature hydraulic width adjustment, as well as tilt adjustment via a lock valve. The fruit tree trimmers also feature an additional hydraulic vertical lift. All devices are supplied with an appropriate support stand. All devices use saw blades with hard metal cutting discs.



Hedge trimmers for front loaders

The hedge trimmer is suitable for front mounting to tractors or diggers. As standard, it is fitted with four saw blades and can therefore achieve a cutting length of around 1.45m. The width offset is 1m. Upon request, other cutting lengths can also be realised.




Primus fruit tree trimmer

The Primus fruit tree trimmer is the largest model. In its standard design, it is fitted with a central cutting unit with eight saw blades, as well as a topping unit with three saw blades. You can therefore achieve cutting lengths of 2.85m with the central cutting unit and 1.1m with the topping unit.

However, upon request it can also be supplied with up to ten saw blades on the central cutting unit (3.55m cutting length), with up to four saw blades on the topping unit (1.45m cutting length) as well as up to three saw blades (1.1m cutting length) on the undercutter. The width offset is 1m, the vertical lift 1m. The topping unit's cutting angle is adjusted hydraulically. The undercutter (optional) can be adjusted manually or hydraulically. The height of the topping unit can also be adjusted manually.

What's more, the topping unit can be hydraulically swivelled backwards for transport purposes. Optional equipment includes a hydraulically adjustable additional cutter and an automatic release device for hail nets.

Also available if required is a hydraulic aggregate with 60 litre pump.

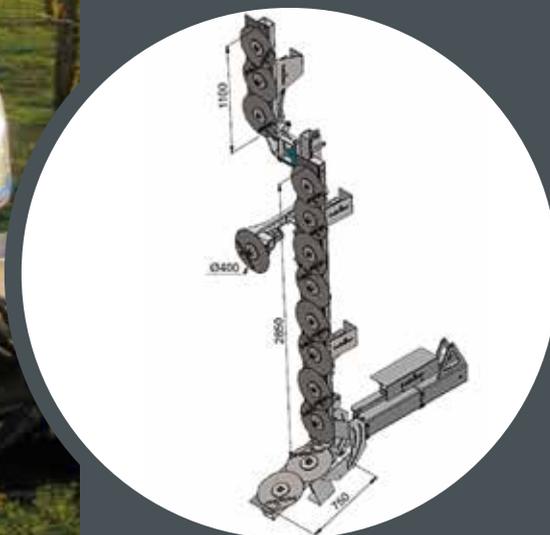

Primus Kompakt fruit tree trimmer




The Primus Kompakt fruit tree trimmer is fitted as standard with a central cutting unit with six saw blades, as well as a topping unit with two saw blades.

You can therefore achieve cutting lengths of 2.15m with the central cutting unit and 0.75m with the topping unit. The width offset is 0.7m, the vertical lift 1m. The topping unit can also be hydraulically swivelled backwards and the cutting angle can be hydraulically adjusted.

However, upon request it can also be supplied with up to three saw blades on the topping unit (1.1m cutting length) as well as up to two saw blades (0.75m cutting length) on the undercutter.

The cutting angle of this model's topping unit can also be hydraulically adjusted. The undercutter (optional) can be adjusted manually or hydraulically. Similarly, the height of the topping unit can also be adjusted manually.

Optional equipment includes a hydraulically adjustable additional cutter and an automatic release device for hail nets.

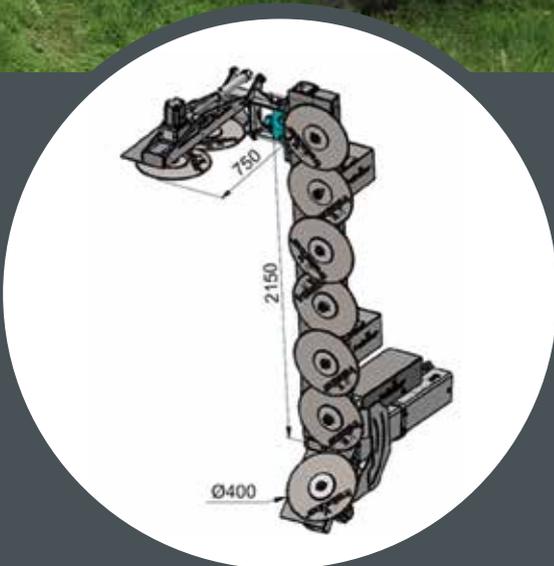

For further information visit www.freilauber.de or just scan the QR-Code.