

# Disc harrow type Powerdisc

For optimum mixing and penetration into the soil

The freilauber compact disc harrow ensures optimum mixing and penetration into the soil with aggressively serrated discs in a developed sloping and under-grip position.

Individually sprung disc suspensions guarantee good ground tracking and overload protection in the event of obstacles.

The practical, manually adjustable disc spacing, the open frame design and the large harrow discs offer a large flow rate even at a working depth of up to 20 cm.

The row width of the disc harrow can be changed very easily and quickly to the desired width.






## Disc harrow type Powerdisc

### Technical data

- 510mm serrated discs
- Maintenance-free, high-quality bearings
- Individual suspension of the discs for ground adaptation
- Lateral baffle plate
- Height-adjustable crumbler roller

### Options

- Hydraulically adjustable crumbler roller

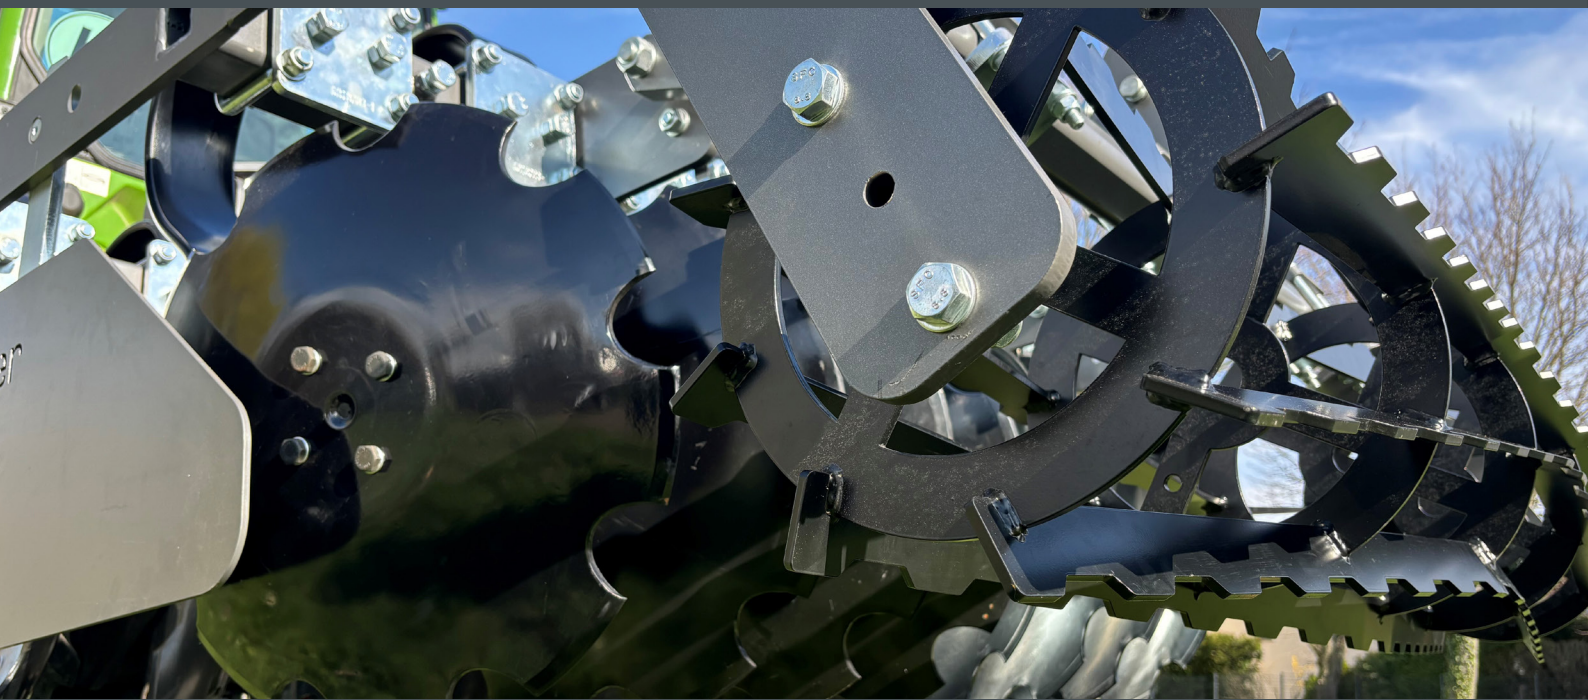

### Dimensions

Width	Number of discs	Disc distance	Weight
1,40m	12	150mm	640kg
1,60m	16	110mm	750kg
1,80m	16	150mm	780kg
2,00m	20	110mm	860kg
2,20m	20	150mm	940kg
2,40m	24	110mm	1.050kg
2,60m	24	150mm	1.130kg
2,80m	28	110mm	1.240kg



You can find more information at [www.freilauber.de](http://www.freilauber.de) or simply scan the QR code.

At your authorised dealer